


GJS In-Line Closure


GJS(04) series are suitable for $\varnothing 10-22\text{mm}$ cable, they can be used in aerial, duct, and direct buried application. The box is made of high quality industrial material, mechanically sealed with filling material. The external components and fastening parts are all made of stainless steel; It can be re-opened without changing sealing material.




GJS(04)-1

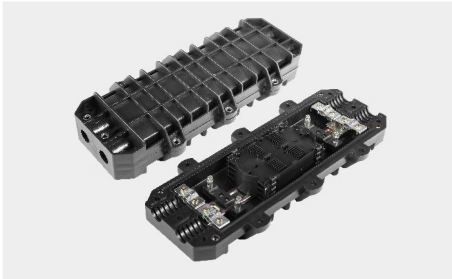

GJS(04)-3

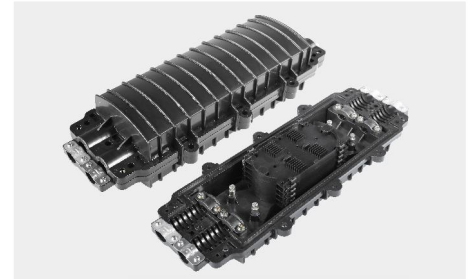

GJS(04)-3Y

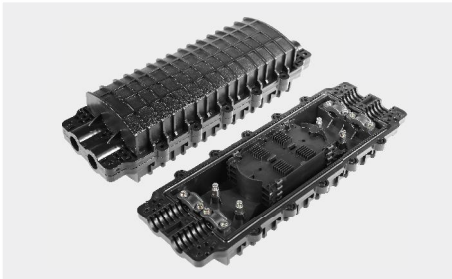

GJS(04)-3S




GJS(04)5B



GJS(04)5C




GJS-(04)5D

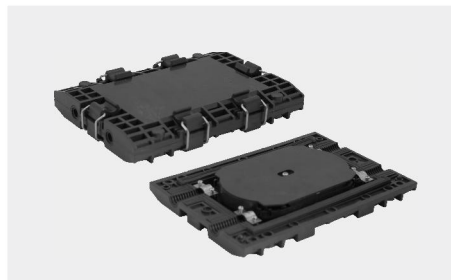

GJS(04)-5DS



GJS-(04)5E

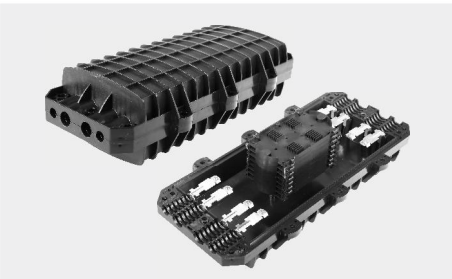

GJS(04)-7B




GJS(04)-8



GJS(06)A



GJS(06)C

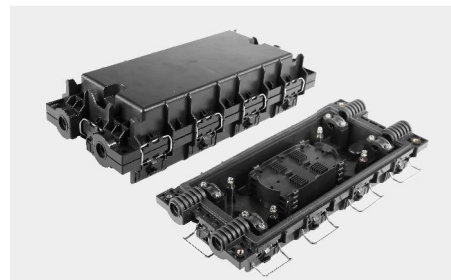

GJS(08)-KS



GJS(08)-KS-2

GJS In-Line Closure

Type	Dimension (mm) W*D*H	Cable diameter (mm)	Capacity of splice tray	Cable port	Max capacity (core)	Sealing structure
GJS(04)-1	435*190*85	φ10~φ17	24 (single fiber)	4	96 (single fiber)	Sticky cincture
GJS(04)-2	435*190*120	φ10~φ22	24 (single fiber)	4	168 (single fiber)	Sticky cincture
GJS(04)-3	435*190*120	φ10~φ22	24 (single fiber)	4	192 (single fiber)	Sticky cincture
GJS(04)-3Y	460*180*120	φ10~φ22	24 (single fiber)	4	96 (single fiber)	Sticky cincture
GJS(04)-3S	425*175*120	φ10~φ22	24 (single fiber)	4	144 (single fiber)	Sticky cincture Silicon gum material
GJS(04)3-PB	435*190*120	φ10~φ22	24 (single fiber)	4	96 (single fiber)	Sticky cincture
GJS(04)-5	435*190*80	φ10~φ17	24 (single fiber)	4	96 (single fiber)	Sticky cincture
GJS(04)5B	350*145*90	φ10~φ22	12 (single fiber)	4	48 (single fiber)	Silicon gum material
GJS(04)5C	210*210*45	φ10~φ22	24 (single fiber)	4	24 (single fiber)	Silicon gum material
GJS-(04)5D	245*150*30	φ7~φ10	24 (single fiber)	4	24 (single fiber)	Silicon gum material
GJS-(04)5DS	212*147*29	φ7~φ10	24 (single fiber)	4	24 (single fiber)	Silicon gum material
GJS-(04)5E	355*180*65	φ10~φ22	12 (single fiber)	4	96 (single fiber)	Silicon gum material
GJS(04)-6	435*140*75	φ10~φ12.5	24 (single fiber)	2	48 (single fiber)	Sticky cincture
GJS(04)-7	435*190*170	φ10~φ22	24 (single fiber)	8	288 (single fiber)	Sticky cincture
GJS(04)-7B	470*240*120	φ10~φ22	24 (single fiber)	8	192 (single fiber)	Sticky cincture
GJS(04)-8	420*150*110	φ10~φ22	24 (single fiber)	6	96 (single fiber)	Sticky cincture
GJS(06)A	335*220*100	φ7~φ15	24 (single fiber)	6	144 (single fiber)	Silicon gum material
GJS(06)C	290*190*90	φ7~φ18	24 (single fiber)	4	92 (single fiber)	Silicon gum material
GJS-(08)-KS	420*185*120	φ10~φ17	24 (single fiber)	4	192 (single fiber)	Silicon gum material
GJS-(08)-KS-2	337*152*84	φ10~φ18	24 (single fiber)	4	144 (single fiber)	Silicon gum material

GJS In-line Closure

GJS(05) series provide 2 inlet ports and 2 outlet ports, The products are made of high quality alloy plastics, mechanically sealed with the filling material, can be used in the harsh weather, The external components and fastening parts are all made of stainless steel, It can be re-opened without changing sealing material; It can be used in aerial, duct, and direct buried application.



GJS(05)-1



GJS(05)-3



GJS(05)-2



GJS(05)-3D

Type	GJS(05)-1	GJS(05)-2	GJS(05)-3	GJS(05)-3D
Dimension (mm) W*D*H	485(440)*165*110	580(480)*185*125	655(550)*215*185	655(550)*215*185
Cable diameter (mm)	φ10~φ22			
Capacity of splice tray	24(single fiber)	24(single fiber)	24(single fiber)	72(ribbon fiber)
Max qty of splice tray	4	6	8	5
Max capacity(core)	96(single fiber)	144(single fiber)	192(single fiber)	360(ribbon fiber)
Sealing structure	Sticky cincture			
Outer carton diameter (mm) W*D*H	550*380*385/6pcs	610*400*410/6pcs	690*505*435/4pcs	690*505*435/4pcs
Outer carton volume (m ³)	0.08	0.1	0.152	0.152
Outer carton weight (kg)	16	22.5	23.9	23.9