

# 25G DWDM TOSA & SFP28


- Data rate up to 25 Gb/s
- Transmission up to 20km
- Tx output power: > +3dBm
- Min. OMA receiver sensitivity: -19dBm
- Operating temperature: 0°C ~ 65°C
- Power consumption < 2.5W
- DWDM, Bi-directional and mobile x-haul applications



25G DWDM TOSA



25G DWDM SFP28

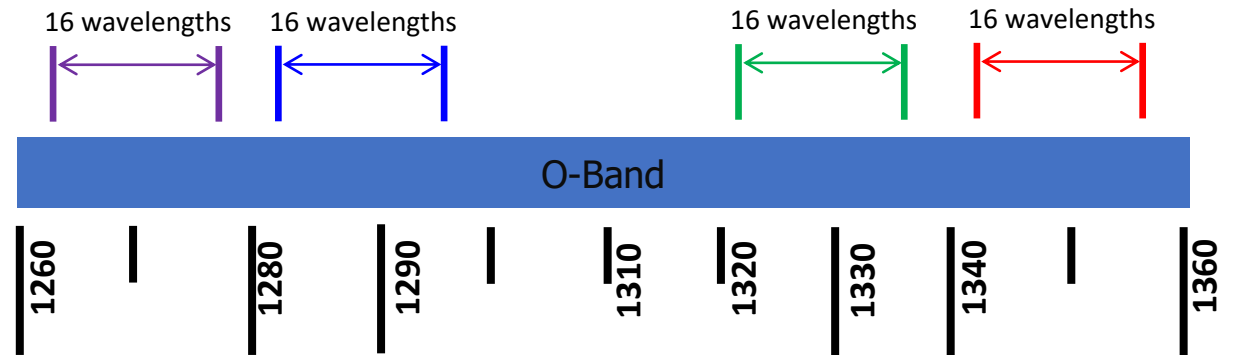

Contact: [slee@cosemi.com](mailto:slee@cosemi.com)  
[krhie@cosemi.com](mailto:krhie@cosemi.com)