


EXCLUSIVE
PATENT DESIGN

Easy-Ex Fiber Patch Cord Solution



Have you run into
the following troubles



!?

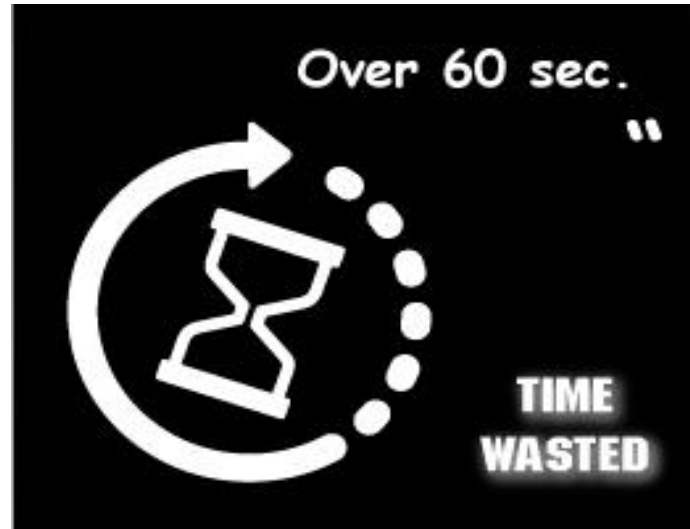



PRODUCT FEATURE


EX-EASY SM OS2 Patch Cord

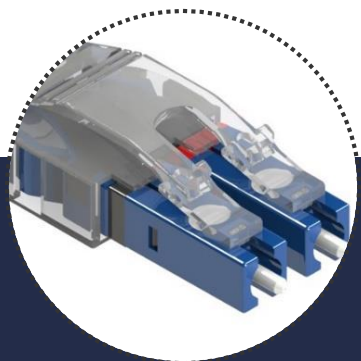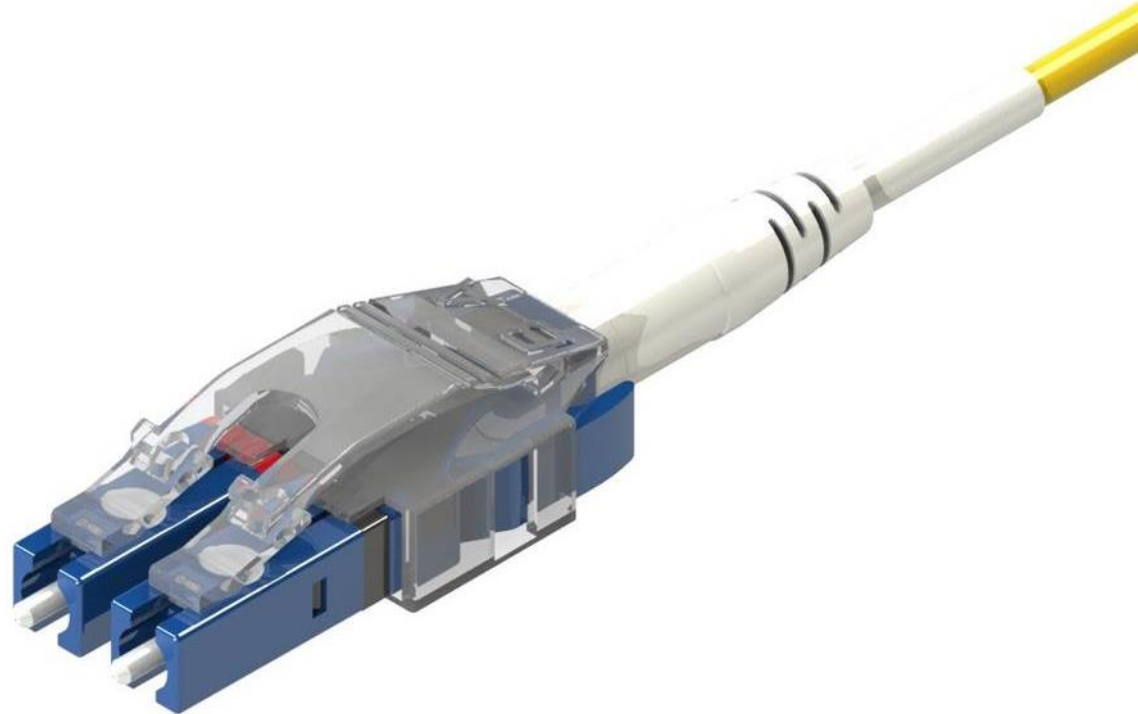

**Quickly Change
LC Polarity**



**Cable/Tubing
OD 1.6mm**

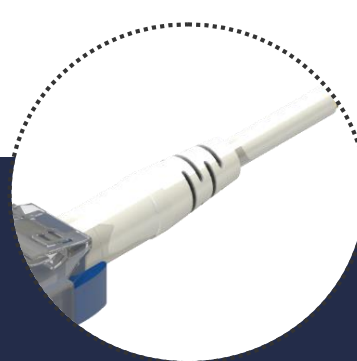

**Good Protection
Of The Boot**



SM G657A Fiber





- **Increase Durability.**
- **Won't Harm Fiber Patch Cord.**
- **Switching polarity the Easiest and the Fastest.**



3

**Second
change**

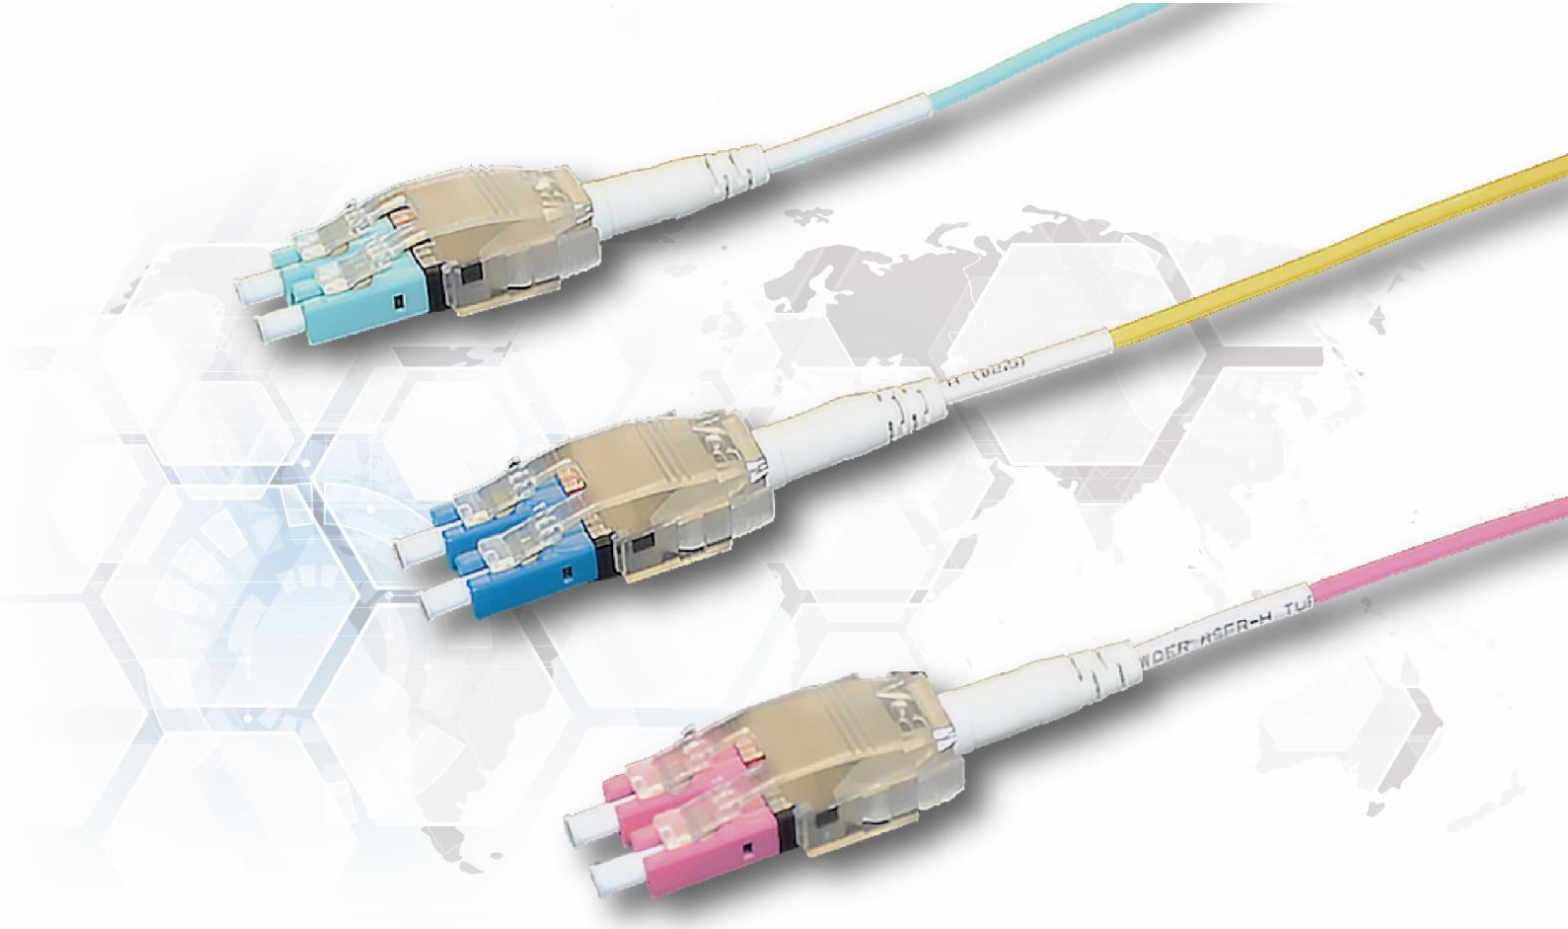

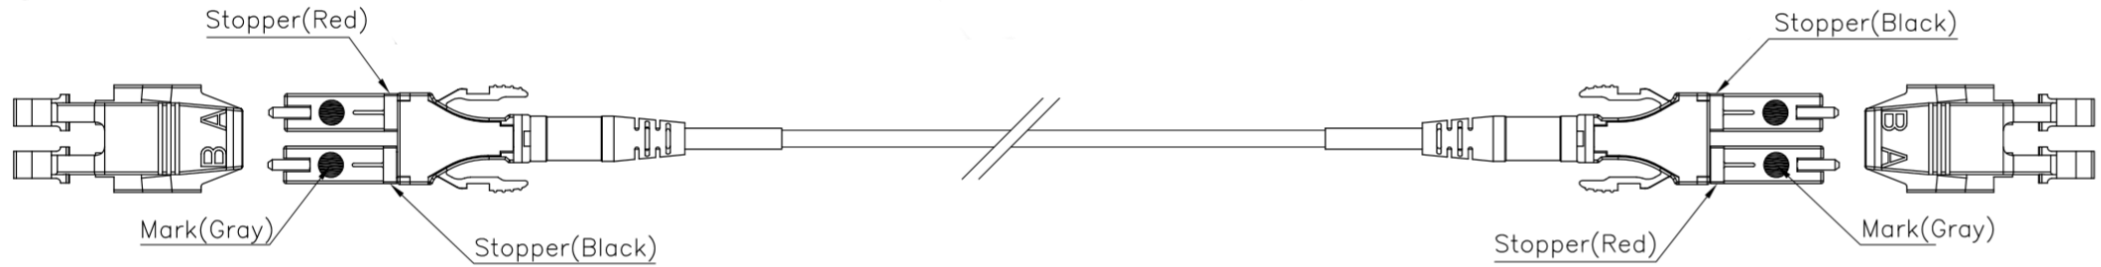

Cable Type

Category	Jacket O.D.	Jacket Material	Color
OM3 (50/125um)	Ø 1.6mm	PVC OFNR/PVC OFNP/LSFRZH	Aqua
OM4 (50/125um)	Ø 1.6mm	PVC OFNR/PVC OFNP/LSFRZH	Aqua/Violet
OM5 (50/125um)	Ø 1.6mm	PVC OFNR/PVC OFNP/LSFRZH	Lime Green
SM (9/125um)	Ø 1.6mm	PVC OFNR/PVC OFNP/LSFRZH	Yellow



USER GUIDE : *LC PC / UPC* CONNECTOR


(1) Press

Both sides to unlock
the trigger module




(2) Remove

The trigger module
direction front

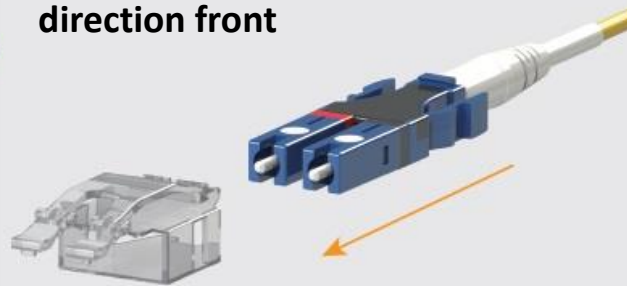


(3) Upside Down

Rotate the connector

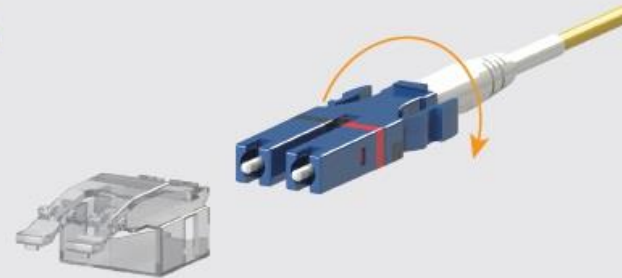


(4) Push

Back until you hear
"CLICK"

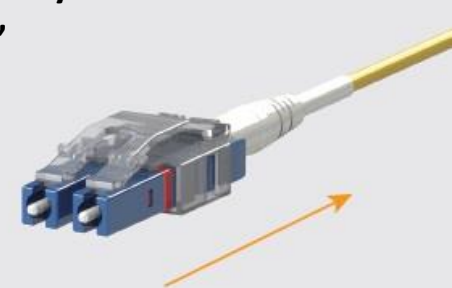

► 3 Second Change Polarity Switchable Steps


Quality Assurance Pass

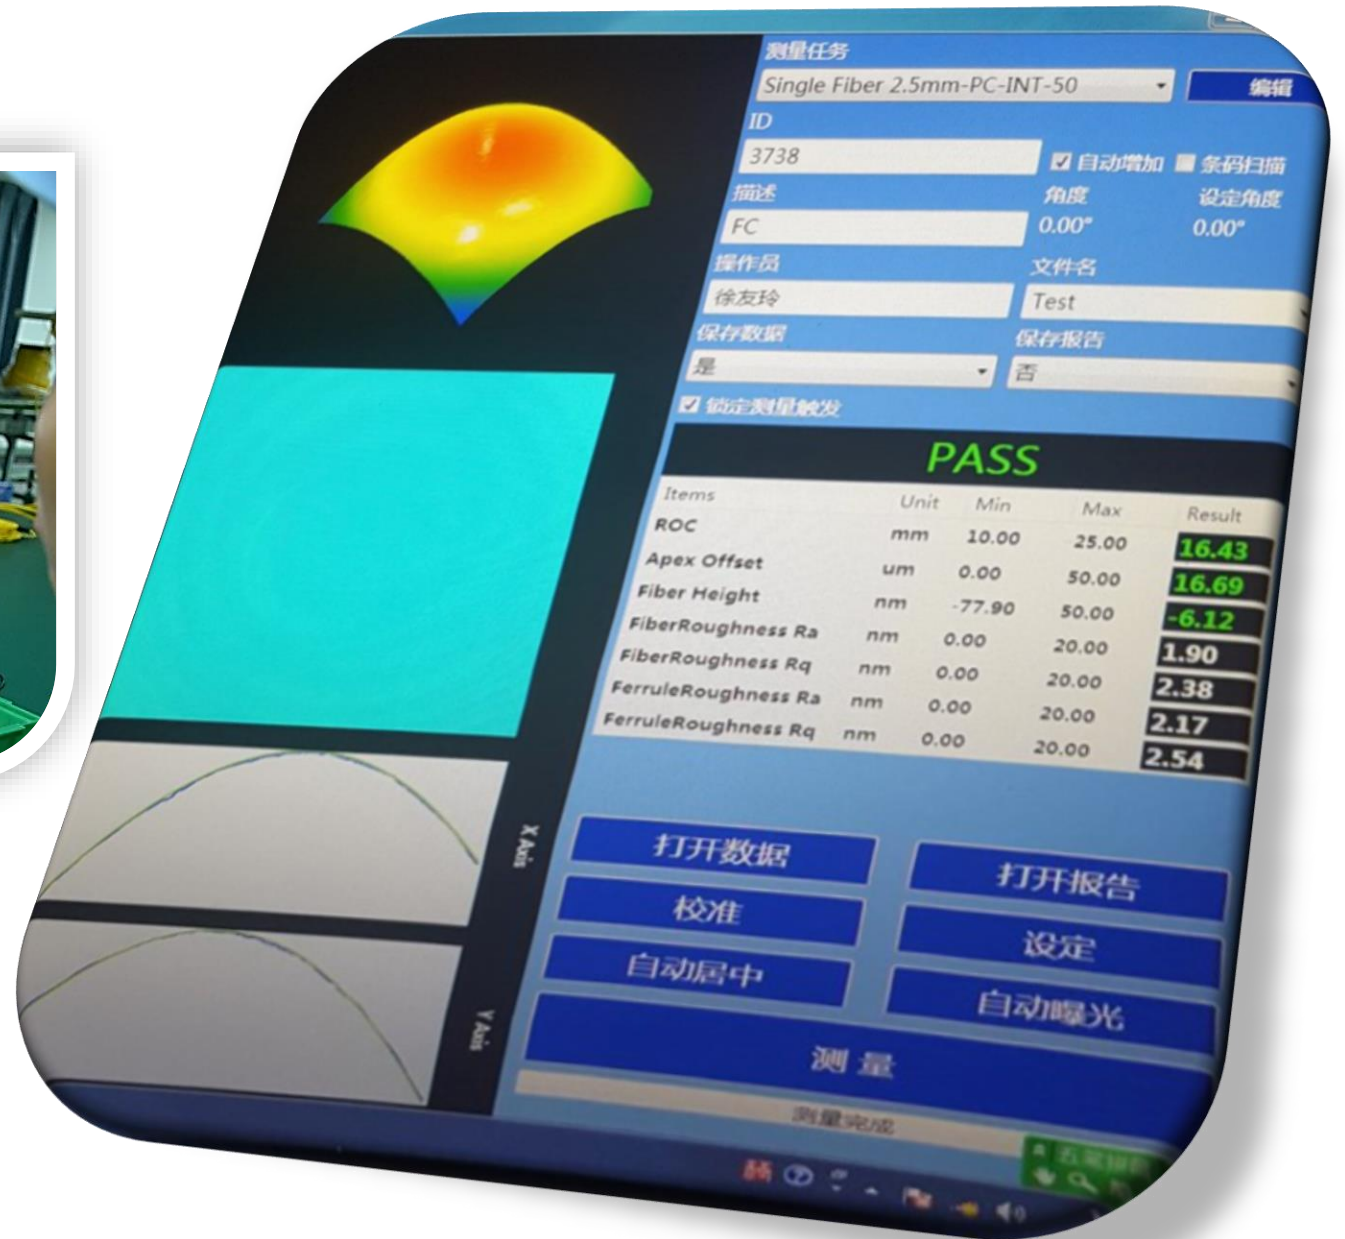

✓ Domaille polished machine & Core-DIP measurements



Domaille

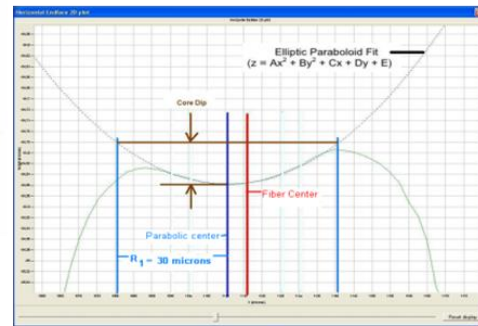

$$\text{CORE DIP} = \frac{(2R_1^2)(A+B)}{4}$$






Annie Hsu

Overseas sales manager

Annie@crxconec.com



Ben Yang

Sales Representative

Ben@crxconec.com

Achieve Excellence With Ease
Explore more information now!

