

## Optical High Power Fiber Amplifier

# EYDFA

## Mini EYDFA Module

### OHA-CC2 Series

The LiComm high power EYDFA module, OHA-CC2 series, is the densely integrated, compact size, ultra high power optical fiber amplifier. The state of the art technology of clad pumping in Er/Yb co-doped amplifying fiber is applied to the optical module for cost sensitive customers with limited space. Also multiple output ports, such as 8, or 16ports, are available to meet various user requirements. The OHA-CC2 series is most suitable for the high quality CATV service application with a number of branching points or the PON (Passive Optical Networks) where high power optical signal is broadcasted through high-count splitters. The OHA-CC2 series provides very stable total output power up to 32 dBm and noise figure of less than 6dB in C-band over wide operating temperature range. Packaged in a very compact package (65 x 160 x 20 mm), OHA-CC2 series also includes control circuitry inside and operates with extremely low power consumption.



### Features

- Including electric control circuits
- Small Size
- CATV-network field proven reliability
- High output power up to 32dBm
- Low noise figure
- Easy operation
- APC (Automatic Power Control)
- Control & monitor with R232
- DC 5.0 volt power supply





### Applications

- PON ( passive optical networks) and FTTH
- CATV network
  - Power booster, Line Amp
  - Distribution, Multi-branching

## Optical Fiber Amplifier

# High Power EYDFA

### Mechanical Dimension (WxLxH = 65x160x20[mm])

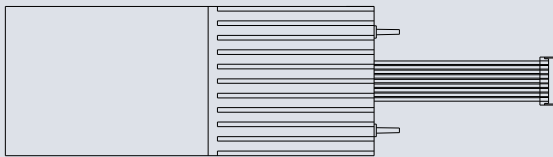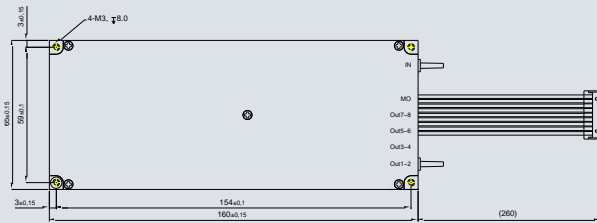

### Optical Characteristics

Parameter	Symbol	OHA-CC2-2008	Unit
Signal wavelength range	$\lambda$	1545 ~ 1562	nm
Normal Input power	$P_{IN}$	Typ. 0	dBm
Max. Total Output power	$P_{OUT}$	20dBm/port x 8ports	dBm
Noise figure <sup>(1)</sup>	NF	<6.5	dB
Optical isolation	ISO	>20	dB
Return loss	RL	>40	dB
Polarization mode dispersion	PMD	<0.5	ps
Polarization dependent gain	PDG	<0.5	dB

(1) Input Power = 0 dBm at 1550 nm

### Electric & Environmental Characteristics

Parameter	Typical Value
Power supply voltage	5 V
Interface	RS232
Operating temperature	-10 ~ 55 °C
Storage temperature	-40 ~ 85 °C
Storage humidity	5 ~ 85 % R.H

Short term exposure to conditions as severe as non-condensing 85/85% RH are acceptable for limited duration (total exposure < 168 hours)

### Ordering Information

OHA - CC2 - XX<sub>1</sub>XX<sub>2</sub>

XX<sub>1</sub> : Output Power  
 XX<sub>2</sub> : Output port numbers

LiComm Co., Ltd.

Address

109, Baekja-ro Idong-myeon, Cheoin-gu, Yongin-Si,  
 Gyeonggi-Do, 17126, Korea

Tel: +82-31-323-1926, 1936 Fax: +82-31-323-2447

E-mail: sales@licomm.com Website : www.licomm.com