







WDM SOLUTIONS




 <p>Barcode Tracking System</p>	 <p>150K CH/month WDM Production Capacity</p>
 <p>OEM/ODM 100% Factory tested</p>	 <p>-40°C ~ 85°C Extreme temperature conditions</p>

Features:

- 100% testing, operating temperature: -40 ~ +85 °C
- Barcode management system for good traceability
- Telcordia GR-1209 and GR-1221 qualified
- Automatic Alignment & Yokogawa spectrum analyzer system



CCWDM Module

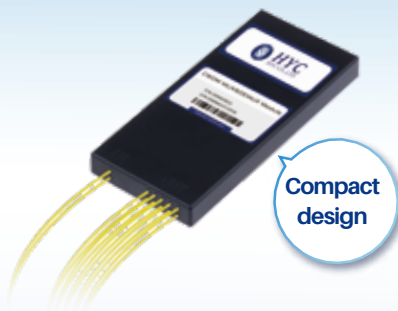

CWDM/DWDM Module



5G DWDM LGX Module



MWDM Module




Athermal AWG



19" Rack GPON

Passive Optical Devices OEM/ODM Manufacturer


MICRO-OPTIC SERIES



Hybrid Devices

Features:


- N in 1 hybrid combination can be customized
- Miniaturized package
- Low dark current
- Epoxy-free optical path

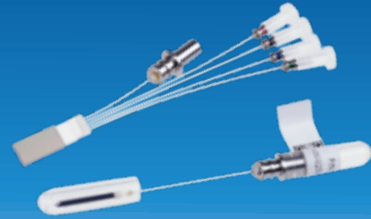

AWG CWDM4

Features:

- Low Insertion Loss
- Good Uniformity
- Planar waveguide technology
- Compact Size
- High Reliability and Stability

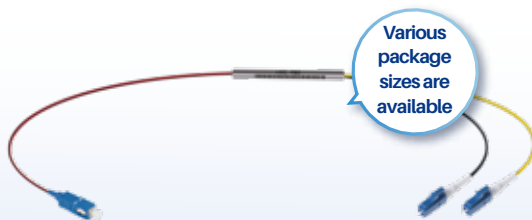

Fiber Coupler

Features:

- Dual Window/Multimode/Single mode/All Band/PM
- Low insertion loss
- High stability and reliability
- Operating temperature -40~+85°C



Optical Circulator

Features:

- Three ports, four ports, different power, different wavelengths can be customized
- High isolation
- Low insertion loss
- High Stability and reliability

Passive Optical Devices OEM/ODM Manufacturer